

Weighing around 80 lb (37 kg) RMT 117 Pneumatic Breaker delivers powerful blow with low air consumption, making it an economical tool for the owner. The breaker has in-built lubrication mechanism which provides continuous lubrication to the internal parts of the tool. Two – bolt backhead and use of spring retainer has made this construction tool lighter in proportion to its hard blows and lesser air consumption. Favorite tool for the user and owner.



What is good about it?

- 100% parts interchangeability
- In-built lubrication system
- Easy access to daily service points
- Easily manoeuvrable


Where it is used?

- Tough construction and plant maintenance work
- Medium to heavy concrete demolition
- Breaking reinforced concrete, heavy road work & general demolition.

Specification

Model #	RMT 117	
Weight with silencer	37 kg	81 lb
Weight without silencer	36 kg	80 lb
Length	710 mm	28"
Air pressure	6 bar	87 psi
Air consumption	35 l/s	74 cfm
Blows per minute	1200	
Piston dia	57 mm	2.25"
Piston stroke	165 mm	6.50"
Air inlet - NPT (M)	19 mm	¾"
Shank size (standard)	32 x 160 mm	1¼" x 6¼"
Chuck size T022093 (Option)	28 x 160 mm	1⅝" x 6¼"
Retainer type	Spring	

*Available with or without noise reducing silencer / muffler

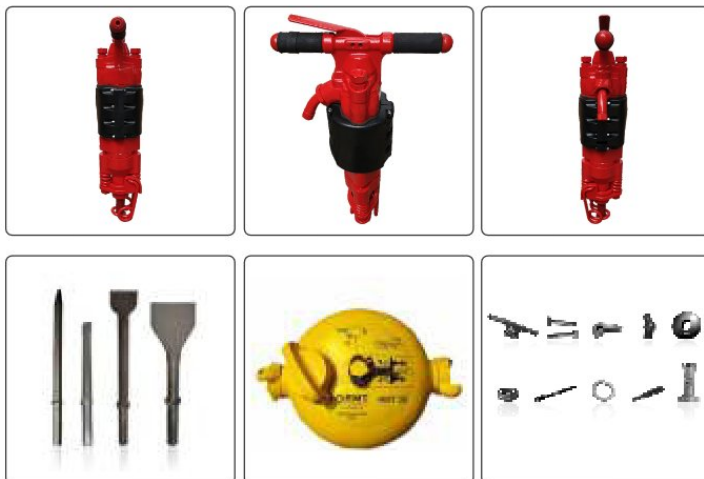

Working Tools

Lubricator

Spare Parts